

**CobbleStone 12x12  
(panel)**



CobbleStone 12x12 (panel), Tan, California Central Coast hotel.

Product Type:

Paver Tile

Recommended Use:

Exterior, Interior, Residential, Commercial  
Pedestrian, Light Vehicular, Floor or Wall Veneer

Installation:

Mortar (aka wet) Set, Thin Set (CTMA method)

Packaging / Weight:

Boxed (11 pcs), Pallets (18 boxes), 8 lbs per sq ft

Suggested Finishes:

Natural, Light, Medium or Heavy Sandblast

Complementary Paver Tiles:

None matching. Contact the factory for possible alternatives.

Matching Accessory / Trim Units::

None matching. Contact the factory for possible alternatives.

Color Selection:

Select colors from the current Cal-Ga-Crete or Davis Colors chart.

Test Results:


<u>Test Results:</u>	<u>ASTM #</u>	<u>Results</u>	<u>Comments</u>
Water Absorption	C-373	7.75%	Unsealed
Breaking Strength	C-648	988 lbs	0.75" thickness
Modulus of Rupture	C-674	1374	0.75" thickness
Abrasive Hardness	C-501	27	
Coefficient of Friction (COF)	C-1028-07	0.70	Smooth Surface
Coefficient of Friction (COF)	C-1028-07	0.77	Light Sandblast
Compressive Strength	C-140-75	6027	0.825" thickness

Notes:

Expect naturally occurring color variations typical for concrete, unglazed ceramic and stone tile products. Apply a quality sealer for wear factor improvement and ease of maintenance. Notify the factory in case of intended exterior use in freeze-thaw climates.

Technical and Contact Information:

Review the latest care and installation recommendations available on Cal-Ga-Crete's website [www.calgacrete.com](http://www.calgacrete.com). For inquiries email [info@calgacrete.com](mailto:info@calgacrete.com) or call 310-639-8960.

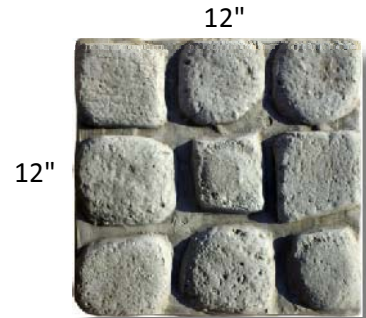

Design Style:

Old World  
Street Cobbles  
European