



Convex Tile 6x12, Aspen color, Garment Showroom, West Hollywood CA

Product Type:  
Wall Veneer Tile

Recommended Use:  
Exterior, Interior, Residential, Commercial  
Vertical Installation

Installation:  
Wall Veneer Method

Packaging / Weight:  
Boxed (10 pcs), Pallets (18 boxes), 8 lbs per sq ft

Suggested Finishes:  
Natural, Light Sandblast

Complementary Paver Tiles:  
None matching. Contact the factory for possible alternatives.


Matching Accessory / Trim Units:  
None matching. Contact the factory for possible alternatives.

Color Selection:  
Select colors from the current Cal-Ga-Crete or Davis Colors chart.

<u>Test Results:</u>	<u>ASTM #</u>	<u>Results</u>	<u>Comments</u>
Water Absorption	C-373	7.75%	Unsealed
Breaking Strength	C-648	988 lbs	0.75" thickness
Modulus of Rupture	C-674	1374	0.75" thickness
Abrasive Hardness	C-501	27	
Coefficient of Friction (COF)	C-1028-07	0.70	Smooth Surface
Coefficient of Friction (COF)	C-1028-07	0.77	Light Sandblast
Compressive Strength	C-140-75	6027	0.825" thickness

Notes:  
Expect naturally occurring color variations typical for concrete, unglazed ceramic and stone tile products. Apply a quality sealer for wear factor improvement and ease of maintenance. Notify the factory in case of intended exterior use in freeze-thaw climates.

Technical and Contact Information:  
Review the latest care and installation recommendations available on Cal-Ga-Crete's website [www.calgacrete.com](http://www.calgacrete.com). For inquiries email [info@calgacrete.com](mailto:info@calgacrete.com) or call 310-639-8960.

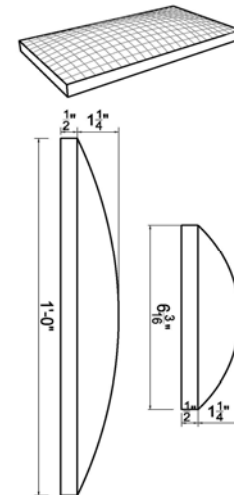

Design Style:  
1970s Office Partition  
Contemporary