



Slate 6x12, 12x12 and 12x18, Steel Gray, Theme Park, Southern California

Product Type:

Paver Tile

Recommended Use:

Exterior, Interior, Residential,  
Commercial, Wall or Floor Veneer

Installation:

Mortar (aka wet) Set, Thin Set (CTMA method)

Packaging Type:

12x12 + 6x12 = 16 ft/bx, 12x18 = 16½ ft/bx

Available Finishes:

Smooth, Light, Medium or Heavy Sandblast

Complementary Paver Tiles:

None matching. Contact the factory for possible alternatives.

Matching Accessory / Trim Units::

Stair Coping 12x13

Color Selection:

Select colors from the current Cal-Ga-Crete or Davis Colors chart.

Test Results:


<u>Test Results:</u>	<u>ASTM #</u>	<u>Results</u>	<u>Comments</u>
Water Absorption	C-373	7.75%	Unsealed
Breaking Strength	C-648	988 lbs	0.75" thickness
Modulus of Rupture	C-674	1374	0.75" thickness
Abrasive Hardness	C-501	27	
Coefficient of Friction (COF)	C-1028-07	0.70	Smooth Surface
Coefficient of Friction (COF)	C-1028-07	0.77	Light Sandblast
Compressive Strength	C-140-75	6027	0.825" thickness

Notes:

Expect naturally occurring color variations typical for concrete, unglazed ceramic and stone tile products. Apply a quality sealer for wear factor improvement and ease of maintenance. Notify the factory in case of intended exterior use in freeze-thaw climates.

Technical and Contact Information:

Review the latest care and installation recommendations available on Cal-Ga-Crete's website [www.calgacrete.com](http://www.calgacrete.com). For inquiries email [info@calgacrete.com](mailto:info@calgacrete.com) or call 310-639-8960.

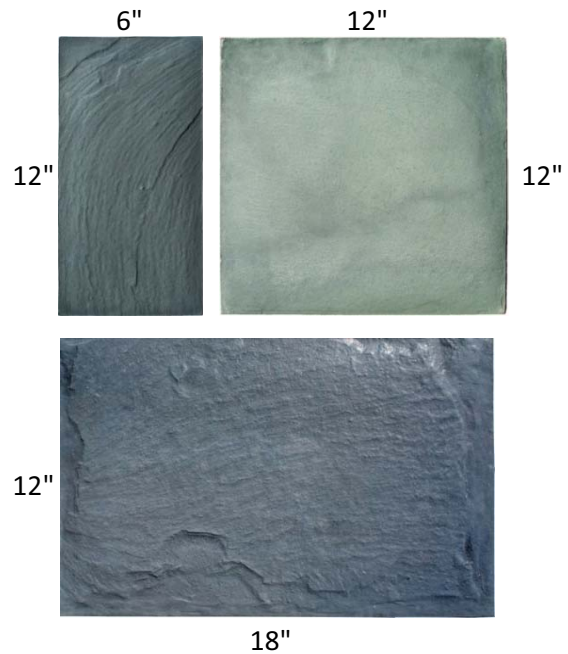

Design Style:

Cut Slate Pattern  
Ashlar Pattern  
Cleft Stone